



KONICA MINOLTA

**MGI**  
Digital Technology

**JETVARNISH3D Web**  
Digital varnish & iFOIL

# ENHANCE YOUR LABEL AND FLEXIBLE PACKAGING PRODUCTS RETHINK PRINT EMBELLISHMENT



Digital web-fed solution for  
inline spot UV coating & hot foiling

Giving Shape to Ideas

# YOUR ADVANTAGES WITH THE JETvarnish 3D Web

## RETHINK PRODUCTION PRINTING


The JETvarnish 3D Web is the ideal solution for label printers as well as flexible packaging producers, who are looking for a digital way to differentiate their services. The web-solution turns printed jobs into remarkable products that will immediately catch the attention of your customers. The growing label and flexible packaging markets are expecting higher flexibility, shorter run lengths, faster delivery times and personalisation. With the JETvarnish 3D Web it is easy to highlight defined areas or add tactile 3D effects to digital, flexo or offset jobs. In combination with the inline hot foiling module it is the perfect device to achieve high added value and differentiation.

### iFOIL TECHNOLOGY

- For digital and variable 2D and 3D varnish and foil embellishments
- Added value for self-adhesive labels as well as flexible packaging
- Metallic, holographic and coloured foil from 100 up to 420 mm width can be used

### MGI ARTIFICIAL INTELLIGENCE SMARTSCANNER (AIS)

- Varnish and hot-foil registration system
- Automatic skew, stretch contraction and shift adjustment on the fly
- Each sheet is scanned and automatically compared with the digital mask file
- No registration marks
- Reduced make-ready time and waste

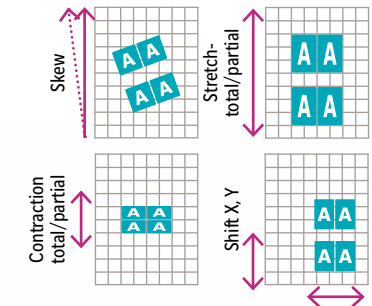

### DIE CUTTING UNIT

- Optional semi-rotary die cutting unit to finish labels in-line
- 2 slitter knives as standard (10 max)
- Gap master system as an option

### WIDE COMPATIBILITY

- The JETvarnish 3D Web is compatible with digital, flexo and offset web-to-web printing technologies, which are used to produce labels as well as flexible packaging
- Applies spot UV varnish and hot-foil on coated & uncoated materials, synthetics, paper as well as light cardboard (e.g. beverage, cosmetics & healthcare, label, wine, etc.)

### EASE OF USE

- While it should be emphasized that the JETvarnish 3D Web is not a push button press, you will quickly understand how the device works, as it is relatively easy to use
- There is less “make-ready” or other special skills required
- For maximum ease of operation
- Frees operators for other jobs

### HIGH PRODUCTION SPEED AND PERFECT VARNISH QUALITY

- Speed up to 42 m/min.
- For tactile and embossing effect from 7 to 232 microns (µm)

### FULL ROTARY FLEXO UV STATION

- Inline Rotary Flexo UV station
- For full varnishing and priming
- Makes UV varnish and hot foiling finishing possible on a high variety of substrates (including uncoated materials)

### ROLL UNWINDER & REWINDER

- Web width from 100 mm up to 420 mm
- 3 inch diameter air shaft
- Reels up to 850 mm diameter
- Automatic reel diameter calculation
- Automatic tension adjustment
- Web guide for ±15mm lateral correction
- Splicing table



# TECHNICAL SPECIFICATIONS

## SYSTEM SPECIFICATIONS

<b>Printing Speeds</b>	Up to 42 m/min. <sup>1</sup> (depending on application).
<b>Supported Web Widths</b>	From 100 mm up to 420 mm
<b>Finishing Width</b>	The maximum image width is 405 mm
<b>Substrate Types<sup>2</sup></b>	From 50 up to 400 microns (µm) Coated, uncoated and textured paper, film or label, self-adhesive labels, white or transparent synthetics, PP, PE, POP, PET, light cardboard/folding carton, shrink film: PVC, PETG
<b>Wide Compatibility</b>	Compatible with the overall web-to-web printing technologies, narrow web digital presses and the traditional offset or flexo narrow web presses.
<b>Unwinder</b>	Maximum roll diameter capacity: 850 mm; Standard inside core diameter: 3 inches; Maximum roll weight: ±120 kg
<b>UV Flexo Station</b>	An integrated flexo station for full size sleeve coating in rotary. This station is used to apply a UV protection varnish or primer prior to finishing. The module comes with an UV dryer. The station is equipped with an anilox cylinder. Additional anilox cylinders are available as upgrade options.
<b>Spot UV Coating and Embossing Station</b>	This station uses MGI award-winning inkjet technology for producing Spot UV coating. Any defined label area can receive Spot UV coating with or without raised 3D texture effects. A simple grey level TIFF file designed by pre-press controls the surface area and the thickness of the varnish applied over the printed roll. This 100% digital process eliminates traditional plates, screens and dies.
<b>Varnish thickness</b>	From 7 <sup>2</sup> to 232 <sup>2</sup> µm of varnish thickness (from 2D flat coats to 3D raised effects).
<b>Inline curing</b>	The unit is equipped with an UV dryer and a cooling drum for optimum web temperature control. The curing sequence also includes a special forward and backward roll motion to dry each label and eliminate waste between runs.
<b>UV Varnish</b>	Gloss varnish 99 GU
<b>Hot Foiling Station</b>	The hot foiling station adds luxurious effects and brand value to label and packaging products. Any defined label area can receive digitally-controlled foil with or without raised effects. A simple grey level TIFF file designed by pre-press controls the surface area and the definition of the foil applied on the printed roll. This 100% digital process eliminates traditional dies, plates and screens. Foil application can be bypassed when not necessary.
<b>Foil rolls</b>	Foils are delivered on rolls: Foil widths from 100 mm up to 420 mm; Foil roll core diameter: 1" and 3"; Foil lengths from 400 m up to 2,000 m; Up to 3 rolls can be used simultaneously during the production

<b>Rewinder</b>	Servo-motorized unit; 850 mm maximum roll diameter capacity; Standard inside core diameter: 3 inches; Maximum roll weight: ± 120 kg
<b>Printing Press Compatibility List</b>	Digital: Konica Minolta AccurioLabel, HP Indigo WS4500, HP Indigo, WS6800, Epson, Xeikon, EFI, Durst, etc. Offset: All manufacturers and technologies: UV, H <sub>2</sub> O or WATERLESS Flexo: All manufacturers and technologies: UV or water based
<b>Dimensions &amp; Weight</b>	Up to 11.85 x 1.58 x 1.81 m (L x W x H) <sup>3</sup> 1 meter clearance required on all 4 sides Weight: ± 4,447 kg <sup>3</sup>
<b>Technical Requirements</b>	400 V - 3Ph; 240 V - 1Ph; Dry air compressor (oil-free): 8 bar/102 psi - 24 m <sup>3</sup> /h/6 cfm; All speeds are nominal

## AVAILABLE OPTIONS

<b>Corona substrate treatment module</b>	In-line system made to optimise varnish adhesion on complex printed substrates
<b>Variable Data Printing</b>	To manage and edit files on the workstation, Full variable data (text, graphic, image) for both 2D/3D Spot Coating and Hot Foiling areas, Integrated barcode (1D/2D) reader system & controller, Raster Image Processor (RIP) as an option
<b>Die Cutting Unit</b>	A semi-rotary die cutting unit is available as an option to finish labels in-line on the JETvarnish 3D Web. The unit uses a 21" magnetic cylinder and an automatic registering system. 2 slitter knives are included as well as a matrix rewinder. Format in semi-rotary: 100 up to 480 mm; Maximum matrix diameter: 600 mm; 2 slitter knives as standard (10 max.); Gap master system for die height adjustment as an option.

<sup>1</sup> speed will vary according to printing parameter used

<sup>2</sup> confirm substrate compatibility with Konica Minolta

<sup>3</sup> depending on the configuration

The support and availability of the listed specifications and functionalities varies depending on applications as well as system configurations. The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size. The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity. Some of the product illustrations contain optional accessories. Specifications and accessories are based on the information available at the time of printing and are subject to change without notice. Konica Minolta does not warrant that any prices or specifications mentioned will be error-free. All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

## Konica Minolta Business Solutions Asia Pte Ltd

10 Teban Gardens Crescent  
Singapore 608903  
Tel: +65 6895 8595  
Fax: +65 6561 9879  
Email: enquiry@konicaminolta.sg  
www.konicaminolta.asia/business

## PRESENCE IN THE REGION

BANGLADESH . BHUTAN . BRUNEI . CAMBODIA . INDONESIA . LAOS . MALAYSIA . MAURITIUS . MYANMAR . PHILIPPINES . SINGAPORE . SRI LANKA . THAILAND . VIETNAM

## About Konica Minolta Business Solutions Asia

Konica Minolta Business Solutions Asia, based in Singapore, is a wholly owned subsidiary of Konica Minolta Inc., Tokyo, Japan. With its expertise in imaging, data processing and data-based decision making, Konica Minolta creates relevant solutions for its customers and solves issues faced by society.

As a digital workplace solution provider, Konica Minolta helps its clients to identify and unlock the potential digitalisation to help companies reach the next level in the digital maturity of their organisation by rethinking the workplace.

Konica Minolta's Igniting Print Possibilities offering helps printers, converters and brand owners maximize workflow automation to increase efficiency. The company delivers consultancy in all communication matters as well as top-of-the-line production, packaging and label printers. Its finishing devices create print products that stand out and create added value. Konica Minolta has established itself as the production printing market leader for more than a decade (InfoSource).

With its commitment to the Sustainable Development Goals (SDGs), Konica Minolta has pledged to consistently pursue its sustainability and social responsibility goals. The company has been repeatedly recognized for its rich history of social contribution as well as for working towards achieving the SDGs throughout its business and is listed among "2021 Global 100 Most Sustainable Corporations in the World", also having received the highest level in EcoVadis Sustainability Ratings.

Worldwide, the company has over 43,000 employees and is operating in over 150 countries.

**Our organisation is certified according to ISO27001, ISO9001, ISO14001 and ISO13485 standards.**



Please scan for more information on MGI JETvarnish 3D Web



FOR THE EARTH. FOR THE FUTURE.